

165 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:

G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G165 ALLGAS
220-240/50/1
Nugget Ice Makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH



WI-FI

FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter
- Frontal air intake and exhaust



ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
Cubetto Nugget M 15.8x 15x 7.7mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	165 364	158 348	150 331	139 306
21° 70°	156 344	150 331	144 317	134 295
32° 90°	143 315	136 300	130 287	120 264
38° 100°	132 291	126 278	120 264	110 242

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	177 390	173 381	167 368	160 353
21° 70°	171 377	169 372	164 361	156 344
32° 90°	164 361	162 357	157 346	147 324
38° 100°	159 350	157 346	153 337	141 311

OPTIONAL

- Sanitization cycle programmable with ozone
- IoT cloud connection

DEPOSIT

MG105-MG155 (KBD105-155)
MG205-MG255 (KB205-255)
MG305 (KB305)
MG405 (KBM405)
MG505 (KBM505)

DIMENSIONS

L x P x H (mm)



570 x 545 x 535



650 x 600 x 690

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

Kg

Kg

G165	AG	220-240/50/1N		665	660	10	11.3	5.4	55	62
G165	AG	220-240/50/1N		665	580	10	7.5	55.8	55	62

165 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:


G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G165 ALLGAS

220-240/50/1

Nugget Ice Makers


DIMENSIONS

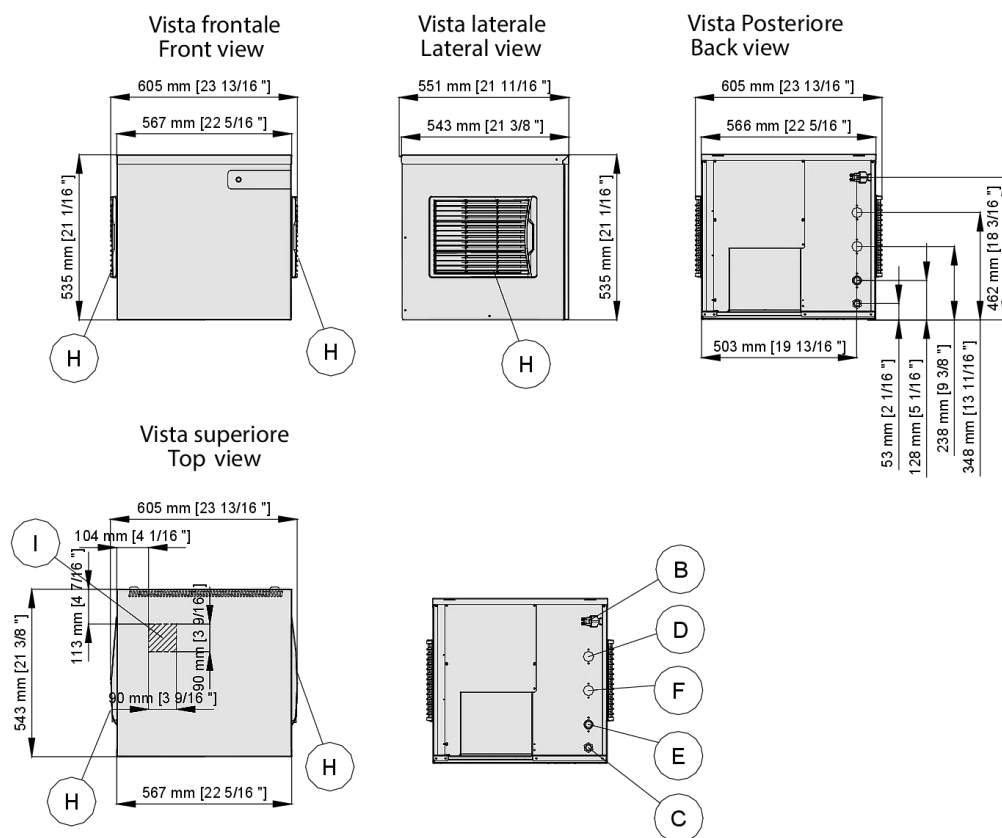

- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua
Water outlet connection
Ø 20 mm
- D** Uscita acqua condensatore ad acqua/Water outlet connection
water condensation 3/4"G
- E** Attacco entrata acqua
Water inlet connection
3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection
water condensation 3/4"G
- H** Filtro aria
Air filter
- I** Foro caduta ghiaccio
Ice drop area

MyICE


Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone

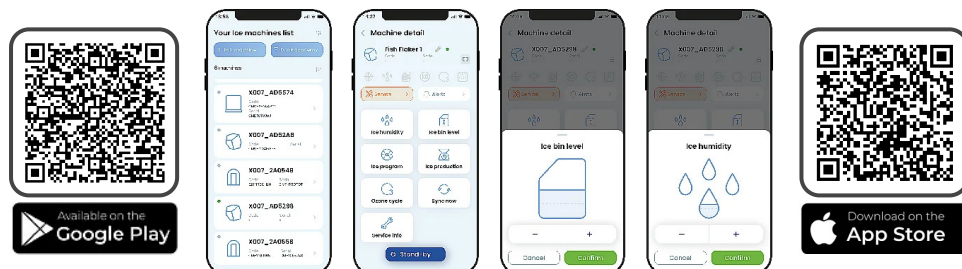

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2218 W
Air Volume	300 m³/h