

470 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:
G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G505 ALLGAS
400/50/3
Nugget Ice Makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH



WI-FI

FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter
- Frontal air intake and exhaust



OPTIONAL

- Sanitization cycle programmable with ozone
- IoT cloud connection

DEPOSIT

MG405(KBM405)
MG505(KBM505)
MB500-700-1000
MC140-320-620

DIMENSIONS

L x P x H (mm)



668 x 668 x 709



750 x 727 x 855

VOLTAGE



400/50/3
230/50/1

GAS



R290
GWP 3

ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
 Cubetto Nugget M 15.8x 15x 7.7mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	470 1036	444 979	435 959	395 871
21° 70°	440 970	420 926	408 899	360 793
32° 90°	378 833	365 804	350 771	310 683
38° 100°	340 749	328 723	314 692	284 626

Water cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	429 946	407 897	394 868	356 785
21° 70°	420 926	398 877	385 849	352 776
32° 90°	400 882	385 849	370 815	339 747
38° 100°	367 809	354 780	339 747	308 679

TECHNICAL DATA



										
		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg	
G505 AG	400/50/3N		2778	1650	16	15.7	15.8	103	112	
G505 AG	400/50/3N		2778	1500	16	13.8	104.3	103	112	
G505 AG	220-240/50/1N		2778	1650	16	15.7	15.8	103	112	
G505 AG	220-240/50/1N		2778	1500	16	13.8	104.3	103	112	

DIMENSIONS

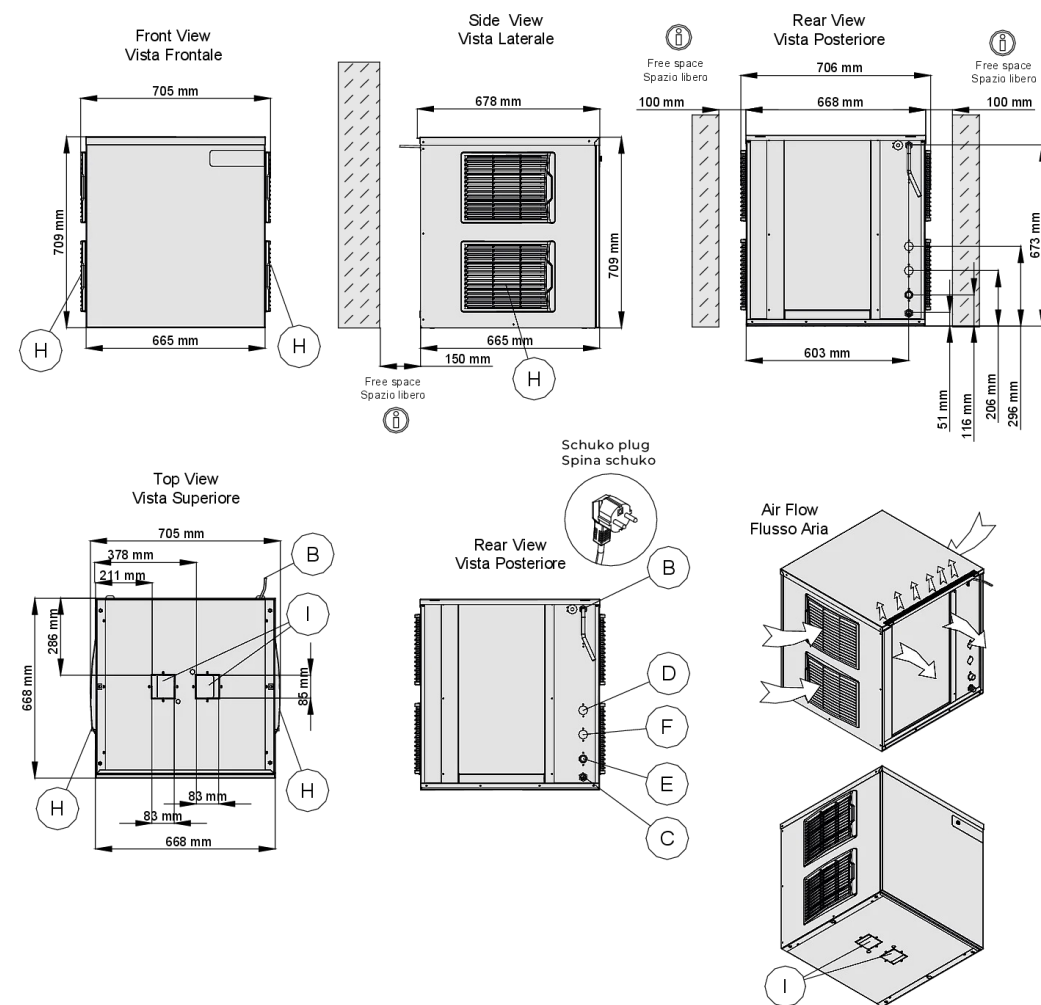


MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	4171 W
Air Volume	1200 m³/h